







SOLAR MODULES

Features & Performance



Our PV modules have been certified by the CE; SKY ENERGY is certified by ISO9001, ISO14001, OHSAS18001 etc. As a leading PV manufacturer in Indonesia, our prioritized goal is to keep developing and producing high quality and high efficiency modules.

-  **Maximum Power: 130Wp**
-  **Module Efficiency: 15.16%**
-  **Product Warranty: 10 years**
-  **Power Warranty: 10 years $\geq 90\%$
25 years $\geq 80\%$**


ST36p130/120/110
ST36P100/90/80
ST36P70




Mechanical Property


-  Snow loads up to 5400Pa
-  Wind loads up to 2400Pa

Low Light Performance

-  Excellent performance under low light (morning, evening and cloudy days)

High Durability

-  Durable PV modules, independently tested for harsh environmental conditions, such as exposure to salt mist, ammonia and known PID risk factors.

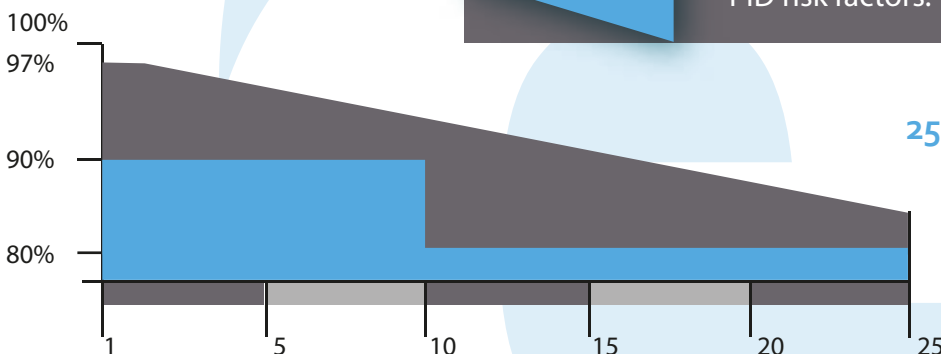

25 Years Linear Warranty



Electrical Performance (STC: AM 1.5, 1000W/m², 25°C)

Module Type	ST36P130	ST36P120	ST36P110	ST36P100	ST36P90	ST36P80	ST36P70
Maximum Power (Pmax / W)	130	120	110	100	90	80	70
Power Tolerance	± 3%						
Maximum Power Voltage (Vm / V)	18.1	18.0	17.9	17.9	17.8	17.7	17.6
Maximum Power Current (Im / A)	7.19	6.65	6.16	5.59	5.05	4.51	3.97
Open Circuit Voltage (Voc / V)	21.9	21.8	21.7	21.7	21.6	21.5	21.3
Short Circuit Current (Isc / A)	7.92	7.33	6.77	6.16	5.66	5.05	4.44
Module Efficiency (%)	15.16	15.05	14.93	14.78	14.76	14.74	14.51

System Design

Operation Conditions

Static Load (Front/Back)	5400Pa/2400Pa	Maximum System Voltage (VDC)	1000 (IEC)/ 600 (UL)
Application class	Class A	Maximum Series Fuse Rating (A)	10
Fire safety class (IEC61730)	Class C	Operating Module Temperature (°C)	-40 to +85

Mechanical Properties

Dimensions (LxWxH / mm)	1280x670x30	1190x670x30	1100x670x30	1010x670x30	910x670x30	810x670x30	720x670x30
Installation holes distance (LxW/mm)	840x640	780x640	720x640	660x640	600x640	540x640	480x640
Weight (Kg)	11.2	10.9	10.3	10	8.8	8	6.6
Sizes of Cells (LxW/mm)	156x135	156x124.8	156x114.5	156x104	156x93.6	156x83	156x73
No. of Cells (pcs)	36 (4x9)						
Sizes of Junction box cable (mm ² /mm)	4 / 900					2.5 / 900	
Container 20GP(pcs)	640	640	800	768	960	960	1120
Container 40HC(pcs)	1632	1728	1920	2016	2304	2688	2880

