


STREET LIGHTING

Applications :
Free Way , Road Way
Residential Street
Parking Lot




SPECIFICATION	STREET LIGHT
Model Name	JskyLED-SSL50
Power	50 Watt
LED Type	JskyLED GW6DME**FCY
Luminous Flux	5,500 ~ 6,500 lm
Efficiency (Lumen/Watt)	110 lm/Watt
LED Efikasi	130 lm/Watt
Light source	LED Chip
Beam Angle	≥ 120°
Pole Φ	Φ60mm
Input supply voltage	12 Vdc
Driver	Meanwell
CCT	6500K
CRI	≥ 80
IP Rating	IP65
Power Factor (PF)	≥ 0.9 ≥ 90 %
Efficiency	≥ 90 %
LED Life Time	50.000 Hours
Operating Temp	-10C~40C
Body Material/Colour	Die-cast Aluminium/Silver

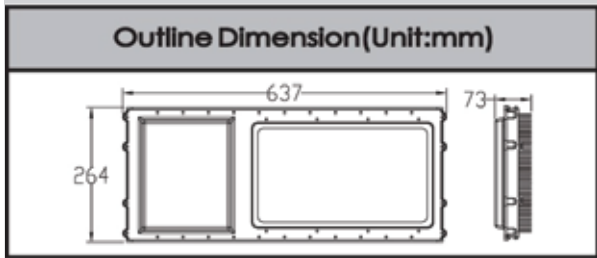

STRUCTURE, MATERIALS, FEATURES :

- * High quality LED with excellent luminous efficiency
- * Wide range light spread
- * Use High efficiency driver
- * Superior Quality Light
- * Thermal conductivity Management
- * No UV or IR radiation
- * High quality Die-cast Aluminium alloy housing

LED Solar Street Light Components

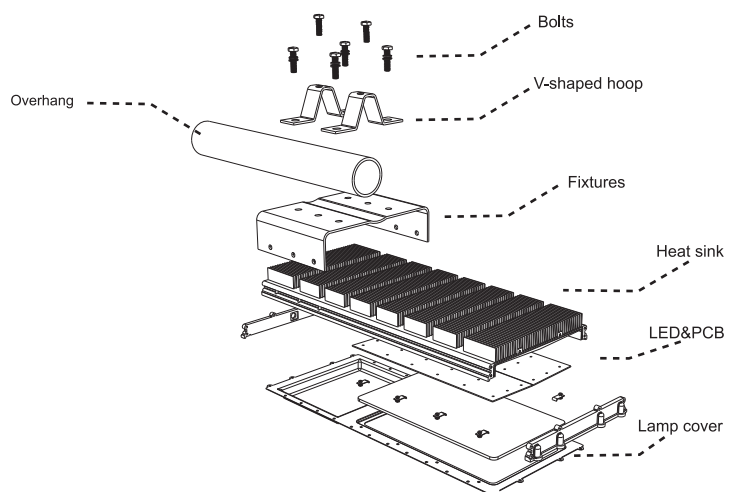

Manufactured : By PT.Sharp Semiconductor Indonesia

